SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Series 700 Model 712/60

SPECfp_rate95 = 21.5

SPECfp_base_rate95 = 21.5

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Jan-96	Hardware Avail: Jan-94	Software Avail: Feb-96

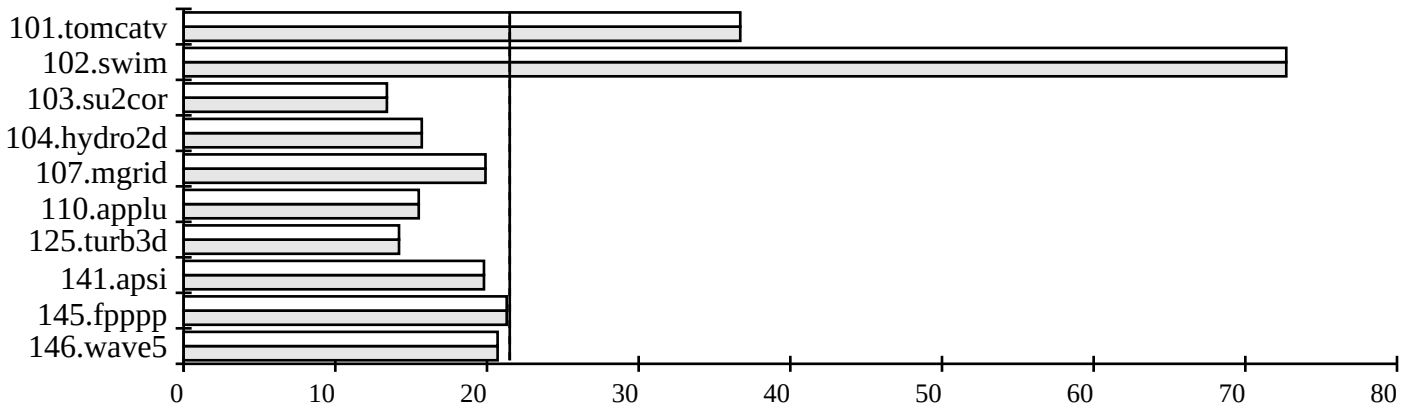

Hardware/Software Configuration for:
HP 9000 Series 700 Model 712/60

Hardware

Model Name:	HP 9000 Series 700 Model 712/60
CPU:	60 MHz PA-RISC 7100LC
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	64KB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	64MB
Disk Subsystem:	1 HP C3325A 2 GB
Other Hardware:	None

Software

Operating System:	HP-UX B.10.10
Compiler:	HP FORTRAN B3906AA B.10.00.01.00
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	1	908	36.7	1	908	36.7
102.swim	1	1065	72.7	1	1065	72.7
103.su2cor	1	940	13.4	1	940	13.4
104.hydro2d	1	1376	15.7	1	1376	15.7
107.mgrid	1	1129	19.9	1	1129	19.9
110.applu	1	1278	15.5	1	1278	15.5
125.turb3d	1	2602	14.2	1	2602	14.2
141.apsi	1	954	19.8	1	954	19.8
145.fpppp	1	4064	21.3	1	4064	21.3
146.wave5	1	1302	20.7	1	1302	20.7
SPECfp_base_rate95 (G. Mean)			21.5			
			SPECfp_rate95 (G. Mean)			21.5

Notes/Tuning Information

```
BASE FLAGS:
All: +Oall +Onofastaccess
Linker Flag: All: -Wl,-a,archive

PEAK FLAGS:
Same as BASE FLAGS.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org