SPECweb96 Result

©Copyright 1996, Standards Performance Evaluation Corporation

Hewlett-Packard
HP Visualize B160L

SPECweb96= 380

Test Date : Oct-96

Tested by : HP Cupertino, CA

Hardware Avail:	Sep-96	OS Avail:	Sep-96	HTTP Software Avail:	Aug-96	SPEC license #:	3

Throughput ops/sec	Response msec
38	13.5
76	13.5
114	13.9
152	15.0
190	16.6
228	18.8
266	22.9
304	30.8
342	48.8
350	59.9
371	85.6
380	107.6

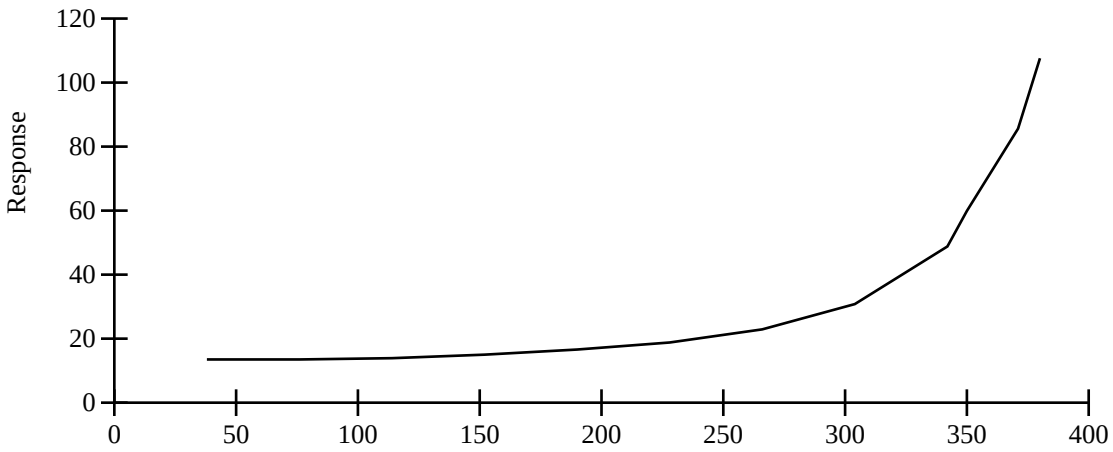

Hardware

Model Name:	HP Visualize B160L
Processor:	160 MHz PA-RISC 7300LC
# of Processors:	1
Primary Cache:	64KB on-chip
Secondary Cache:	1MB(I+D) off-chip
Other Cache:	none
Memory:	384 MB
Disk Subsystem:	2GB disc for OS/Swap/Logs, 2GB disc for Content
Disk Controllers:	1 Built-in FWD SCSI
Other Hardware:	none

Software

Operating System:	HP-UX B.10.20
File System:	HFS
Other Software:	none

HTTP Software

Vendor:	Zeus Technology Ltd.
HTTP Software:	Zeus Server 1.1.3
# of "threads":	2
Server Cache:	zeus -b 800000 -t 900 -l 255
Log Mode:	Common Log Format

Network

# of Controllers:	1
Network Controllers:	HP A3402A 10/100VG AnyLAN
# of Nets:	1
Type of Nets:	100VG AnyLAN
Network Speed:	100 Mbit
Time Wait (secs):	60 (Non RFC1122)

Load Generators

# of Load Generators:	8
# of Processes Each:	12
Model:	HP 9000/720
Processor:	50 MHz PA-RISC 1.1
# of CPUs:	1
Memory:	64KB
OS:	HP-UX B.10.10
Compiler:	unbundled C

Benchmark Configuration

Max Requested Load:	380
Max Fileset Size (MB):	429

Notes/Tuning Information

```
so_qlimit_max 0x100, maxdsiz 0x08000000, maxusers 256
dbc_max_pct 5, ninode 8192, ip_intrqmax 100
workload files set to 0555 permissions
```

For More Information contact

SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110

(703) 331-0180
info@specbench.org
http://www.specbench.org/